

**UTILITY PATENT APPLICATION TRANSMITTAL UNDER 37 C.F.R. §1.53(b)**

ASSISTANT COMMISSIONER FOR PATENTS

Box PATENT APPLICATION

Washington D.C. 20231

Case Docket No. 1-148

Sir:

Transmitted herewith for filing is the patent application of

INVENTOR OR APPLICATION IDENTIFIER: Won-Uk YU

FOR: APPARATUS FOR CONNECTING TV AND COMPUTER

Enclosed are:

- |  |  |
|--|--|
| <p>1. [X] 16 pages of specification, claims, abstract</p> <p>2. [X] 6 sheets of FORMAL drawing.</p> <p>3. [X] 2 pages of newly executed Declaration &amp; Power of Attorney (original).</p> <p>4. [X] Priority Claimed to Korean Appln. No. 49266/1999, whose entire disclosure is incorporated herein by reference.</p> <p>5. [ ] Small Entity Statement.</p> <p>6. [ ] Information Disclosure Statement, Form PTO-1449 and reference.</p> <p>10. [X] Authorization under 37 C.F.R. §1.136(a)(3).</p> <p>11. [ ] Other:</p> | <p>7. [X] Assignment Papers for LG Electronics Inc. (cover sheet, assignment &amp; assignment fee).</p> <p>8. [X] Certified copy of Korean Patent Application No. 49266/1999 filed November 8, 1999.</p> <p>9. [X] Two (2) return postcards.<br/>[X] Stamp &amp; Return with Courier.<br/>[X] Prepaid Postcard-Stamped Filing Date &amp; Returned with Unofficial Serial Number.</p> |
|--|--|

**CLAIMS AS FILED**

For	No. Filed		No. Extra	Rate	Fee
Total Claims	8	- 20	0	X \$18.00	\$0.00
Indep. Claims	5	- 3	2	X \$80.00	\$160.00
Multiple Dependent Claims (If applicable)				X \$270.00	\$0.00
				<b>BASIC FEE</b>	\$710.00
				<b>TOTAL FILING FEE</b>	\$870.00

- [ ] This is a Continuation-in-part (CIP) of prior application No: \_\_\_\_\_ filed \_\_\_\_\_. Incorporation By Reference-The entire disclosure of the prior application is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
- [ ] Amend the specification by inserting before the first line the sentence:  
--This application is a continuation-in-part of Application Serial No. \_\_\_\_\_ filed \_\_\_\_\_.--
- [X] A check in the amount of \$870.00 (Check #9710) is attached.
- [ ] Please charge my Deposit Account No. 16-0607 in the amount of \$\_\_\_\_. A duplicate copy of this sheet is enclosed.
- [X] The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 16-0607. A duplicate copy is enclosed.  
[X] Any additional filing fees required under 37 C.F.R. 1.16.
- [X] The Commissioner is hereby authorized to charge payment of following fees during the pendency of this application or credit any overpayment to Deposit Account No. 16-0607. A duplicate copy of this sheet is enclosed.  
[X] Any patent application processing fees under 37 C.F.R. 1.17.  
[X] Any filing fees under 37 C.F.R. 1.16 for presentation of extra claims.

FLESHNER & KIM, LLP

Daniel Y.J. Kim  
Registration No. 36,186

Correspondence Address Below:

P.O. Box 221200

Chantilly, VA 20153-1200

(703) 502-9440 DYK/kam

Date: November 7, 2000

10915 U.S. PTO  
09/706792  
11/07/00

# APPARATUS FOR CONNECTING TV AND COMPUTER

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

5 The present invention relates to an apparatus for connecting a TV and a computer.

### 2. Description of the Background Art

10 Figure 1 is a view illustrating a state that a TV and a computer are separately used.

The TV is generally placed on a floor of a certain room so that a viewer can view a certain broadcast program, and a computer is installed in a certain room separately from the TV. A certain number of software programs are installed in the computer.

15 As the society is advanced, there is a need for providing various functions such as an internet browsing function, a bi-directional broadcasting function, etc. to the TV compared to the conventional TV which is used for just viewing a simple broadcast program. Recently, the TV has a function similar to the function of the computer. In addition, the computer has an advanced multi-media function, so that  
20 the functions of the computer and TV are overlapped in a digital video image, a video conference system, etc.

In the conventional art, the TV and computer are separately used. A certain interactive function and a data communication are not effectively performed between the TV and computer. When a certain interactive control  
25 function is provided between the TV and the computer for transmitting and

receiving data, it is possible to more effectively use the TV and computer.

## SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to provide an apparatus  
5 for connecting a TV and a computer which is capable of more effectively using a  
TV and a computer by controlling a computer at the side of a TV by connecting the  
TV and computer and transmitting a certain data between the computer and TV.

In the present invention, a transmission line capable of inputting and  
outputting a control signal, video signal and audio signal is connected between a  
10 TV and a computer.

To achieve the above object, there is provided an apparatus for  
connecting a computer and a TV which includes a TV coding unit for encoding  
various control signals such as a TV signal, etc. generated in a TV and generating  
a first packet signal, a computer coding unit for encoding a computer signal such  
15 as a video signal, audio signal and various control signals generated in a  
computer and generating a second packet signal, a TV transmission and receiving  
unit for receiving the first packet signal, transmitting the received first packet signal  
to the outside and receiving the second packet signal from the outside, a computer  
transmission and receiving unit for receiving the second packet signal, transmitting  
20 the received second packet signal to the outside and receiving the first packet  
signal from the outside, a TV decoding unit for receiving the second packet signal  
from the TV transmission and receiving unit, decoding the same and recovering  
into an original signal, a computer decoding unit for receiving the first packet  
signal from the computer transmission and receiving unit, decoding the received  
25 first packet signal and recovering into an original signal, and a transmission line

connected between the TV transmission and receiving unit and the computer transmission and receiving unit for transmitting the first packet signal and the second packet signal.

## 5 BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will become better understood with reference to the accompanying drawings which are given only by way of illustration and thus are not limitative of the present invention, wherein:

Figure 1 is a view illustrating an example that a computer and a TV are  
10 separately used in a certain home;

Figure 2 is a schematic view illustrating a structure for connecting a TV and a computer;

Figure 3 is a block diagram illustrating elements according to the present invention;

Figure 4 is a view illustrating a structure of a transmission line and a  
15 packet signal transmitted through the transmission line according to the present invention;

Figure 5A is a flow chart illustrating an operation of a computer according to the present invention; and

20 Figure 5B is a flow chart illustrating an operation of a TV according to the present invention.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 3 is a block diagram of elements of the present invention which  
25 includes a TV system and a computer system.

The TV system includes a TV coding unit 16 for encoding various signals such as an input signal of a mouse, keyboard, microphone, etc. and a control signal, a TV transmission and receiving unit 15 for transmitting a first packet signal encoded by the TV coding unit 16 to the outside and receiving a second packet signal such as a video signal, an audio signal and a control from the outside, a TV decoding unit 14 for decoding a second packet signal from the TV transmission and receiving unit 15, a video signal output interface unit 17 for receiving a video signal from the TV decoding unit 14, an audio signal output interface unit 18 for receiving an audio signal from the TV decoding unit 14, a control signal output interface unit 19 for receiving a control signal from the TV decoding unit 14, a control signal input interface unit 20 for outputting a control signal to the TV coding unit 16, a wireless receiving module 26 for receiving a wireless signal, a wireless mouse interface unit 21 for receiving a signal from the wireless receiving module 26 and outputting a wireless mouse signal to the TV coding unit 16, a wireless keyboard interface unit 22 for receiving a signal from the wireless receiving module 26 and outputting a wireless keyboard signal to the TV coding unit 16, an amplifier 27 for amplifying a signal from the microphone 19, a microphone interface unit 23 for receiving a signal from the amplifier 27 and outputting a microphone signal, an AV switch 24 for receiving signals from the video signal output interface unit 17 and the audio signal output interface unit 18 and switching the receiving signals, a TV microphone 25 for controlling elements of the TV and a TV main unit 28.

Next, the computer system includes a computer decoding unit 13 for decoding various signals such as an input signal of a mouse, a keyboard, and a microphone and a control signal, a computer coding unit 11 for encoding a video

signal, an audio signal and control signal, a computer transmission and receiving unit 12 for transmitting a second packet signal encoded by the computer coding unit 11 to the outside and receiving a first packet signal such as an input signal of a mouse, keyboard and microphone and a control signal, a video signal output unit 4 for outputting a video signal to the computer coding unit 11, an audio signal output unit 5 for outputting an audio signal to the computer coding unit 11, a control signal output unit 6 for outputting a control signal to the computer coding unit 11, a mouse 7 for receiving a mouse signal from the computer decoding unit 13, a keyboard 8 for receiving a keyboard signal from the computer decoding unit 13, a microphone input unit 9 for receiving a microphone input signal from the computer decoding unit 13, a control signal output unit 10 for receiving a control signal from the computer decoding unit 13, a main board 2 of the computer, a transmission bus 1 of the computer, and a bus interface unit 3 for interfacing each element of the computer.

The operation and effects of the present invention will be explained with reference to Figures 3, 4 and 5.

First, the TV coding unit 16 encodes a TV signal such as various control signals generated in the TV and generates a first packet signal. A chrome signal and control signal generated by the TV main circuit 28 are selected by the TV microcomputer 25 and are applied to the TV coding unit 16 through the control input interface unit 20.

The above-described various control signals applied to the TV coding unit 16 include a microphone signal inputted through the microphone 29 connected with the TV, the amplifier 27 connected with the microphone 29, and the microphone interface unit 23, and a wireless mouse signal and a wireless

keyboard signal inputted from the wireless mouse interface unit 21 and the wireless keyboard interface unit 22 through the wireless receiving module 26.

The computer coding unit 11 encodes a video and audio signal generated in the computer and various control signals and generates a second packet signal.

5 Various signals generated by the main board 2 of the computer are applied to the computer coding unit 11 through the transmission bus 1 and the bus interface unit 3 of the computer and the video output unit 4, the audio output unit 5 and the control signal output unit 6.

The TV transmission and receiving unit 15 outputs the first packet signal 10 generated by the TV coding unit 16 to the outside and receives a second packet signal generated by the computer coding unit 11. In addition, the computer transmission and receiving unit 12 transmits the second packet signal generated by the computer coding unit to the outside and receives the first packet signal generated by the TV coding unit 16.

15 At this time, the computer coding unit 11 is installed in the computer, and the TV coding unit 16 is installed in the TV. Therefore, an additional transmission line which connects the TV transmission and receiving unit 15 and the computer transmission and receiving unit 12 is needed so that the TV transmission and receiving unit 15 and the computer transmission and receiving unit 12 transmit and 20 receive the first packet signal and the second packet signal.

Figure 4 illustrates a transmission line structure according to the present invention and a packet signal transmitted through the transmission line.

The transmission line may be implemented based on a physical line or a wireless type between the TV transmission and receiving unit 15 and the computer 25 transmission and receiving unit 12 for transmitting and receiving the first and

second packet signals. The physical transmission line includes a first transmission line for transmitting a first packet signal from the TV transmission and receiving unit 15 to the computer transmission and receiving unit 12, and a second transmission line for transmitting a second packet signal from the computer transmission and receiving unit 12 to the TV transmission and receiving unit 15.

The first packet signal that the mouse signal, keyboard signal, microphone signal and control signal are encoded in the TV is transmitted through the first transmission line, and the second packet signal that the video signal, audio signal and control signal are encoded in the computer is transmitted through the second transmission line.

The TV decoding unit 14 decodes the second packet signal transmitted from the computer transmission and receiving unit 12 through the second transmission line and recovers to an original signal. Therefore, the second packet signal is recovered into a video signal, audio signal and various control signals by the TV decoding unit 14. The thusly recovered signals are applied to the video signal output interface unit 17, the audio signal output interface unit 18, and the control signal output interface unit 19, respectively.

The computer decoding unit 13 decodes the first packet signal transmitted from the TV transmission and receiving unit 15 through the first transmission line and recovers into an original signal. Therefore, the first packet signal is recovered by the computer decoding unit 13 into a control signal outputted from the TV. The above-described signal includes various signals for controlling the operation of the computer, a microphone signal, a wireless keyboard signal, a wireless mouse signal, etc.

The TV connected with the computer by the connection apparatus



according to the present invention includes a TC coding unit 16 and a TV decoding unit 14, a TV transmission and receiving unit 15, and a signal selection unit 24 for selecting the signal recovered by the TV decoding unit 14 and a current broadcast video signal. The signal selection unit 24 selects a signal among the current broadcast TV video signal and the TV audio signal and inputs the selected signal into the TV main circuit 28. Therefore, the TV can selectively displays a video signal and a broadcast signal of the computer using the signal selection unit 24, and the audio signal and broadcast signal of the computer are selectively outputted to the speaker. In addition, the TV microcomputer 25 applies a TV control signal to the control input interface and receives a computer control signal recovered by the TV decoding unit 14 through the control output interface and applies to the TV main circuit.

The computer connected with the TV by the connection apparatus according to the present invention includes a computer coding unit 11 and a computer decoding unit 13, a computer transmission and receiving unit 12, and a bus interface unit 3 and various input interfaces for applying a signal recovered by the computer decoding unit 13 to the main board 2 of the computer. Various input interface units include a mouse input unit 7, a keyboard input unit 9, a control signal input unit 10, etc. for thereby inputting various control signals generated in the TV to the main board 2 of the computer.

The operation of the connection apparatus according to the present invention will be explained with reference to the accompanying drawings.

The video signal and audio signal generated by the main circuit 28 of the TV are controlled by the TV microcomputer 25, and the TV control signal is applied to the TV coding unit 16 through the control signal input interface unit 20

and is encoded thereby. In addition, the microphone signal generated by the microphone 29 which is separately installed in the TV is amplified by the amplifier 27 and is applied to the TV coding unit 16 through the microphone interface unit 23 and is encoded thereby. The mouse signal and keyboard signal inputted  
5 through the wireless receiving module 26 are applied to the TV coding unit 16 through the mouse interface unit 21 and the keyboard interface unit 22. In addition, the first packet signal encoded by the TV coding unit 16 is applied to the TV transmission and receiving unit 15 and is transmitted to the computer transmission and receiving unit 12 through the transmission line.

10 The first packet signal transmitted to the computer transmission and receiving unit 12 is applied to the computer decoding unit 13 and is recovered to an original signal. Namely, the first packet signal is recovered into a TV control signal, a mouse control signal, a keyboard signal and a microphone signal by the computer decoding unit 13, respectively. The signals recovered by the computer  
15 decoding unit 13 are applied to various bus interface units 3 and are inputted into the main board of the computer through the transmission bus 1 of the computer. As a result, the user controls the computer by operating the TV.

In addition, the video signal, audio signal and various control signals are inputted into the video output unit 4, the audio output unit 5 and the control signal  
20 output unit through the transmission bus 1 of the computer and the bus interface unit 3. The video signal and audio signal inputted into each output unit are encoded into a second packet signal by the computer coding unit 11, respectively, and are transmitted to the TV transmission and receiving unit 15 through the transmission line.

25 The sizes of the first packet signal and second packet signal may be

decreased or increased based on the transmission amount of the data.

The second packet transmission signal transmitted to the TV transmission and receiving unit 15 are applied to the TV decoding unit 14 and are recovered into an original computer video signal, audio signal and control signal. The computer video signal recovered by the TV decoding unit 14 is applied to the signal selection unit 24 of the TV through the video signal output interface unit. One of the computer video signal and the TV video signal is selected by the signal selection unit 24 and is inputted into the main circuit 28 of the TV. Therefore, the video signal of the computer is displayed on the screen of the TV by the operation of the signal selection unit 24.

In addition, the computer audio signal recovered by the TV decoding unit 14 is applied to the TV signal selection unit 24 through the audio signal output interface unit. One of the computer audio signal and TV audio signal is selected by the signal selection unit 24 and is inputted into the main circuit 28 of the TV. Therefore, the audio signal of the computer is outputted through the computer speaker based on the operation of the signal selection unit 24.

The computer control signal recovered by the TV decoding unit 14 is applied to the microcomputer of the TV through the control signal output interface unit 19. The microcomputer which receives the computer control signal controls the main circuit 28 of the TV, so that the video and audio-based operation is implemented by the computer.

Therefore, it is possible to output a video and audio signals of the computer by operating the screen and speaker of the TV based on a user's computer operation.

Figure 5A is a flow chart of the operation of the computer according to the

present invention, and Figure 5B is a flow chart of the operation of the TV according to the present invention.

In the computer according to the present invention, a conventional computer work routine is performed in Step S11, and the video signal, audio signal and control signal of the computer are outputted to the TV in Steps S12, S13 and S14. The mouse signal, keyboard signal, various control signals and microphone signal transmitted from the TV are received in Steps S15, S16, S17 and S18. The computer work routine is repeatedly performed based on the above-described signals.

In the TV according to the present invention, a conventional TV work routine is performed in Step S21, and the video signal, audio signal and control signal transmitted from the computer are received in Steps S22, S23 and S24, and then the video signal and audio signal of the computer are outputted, and the TV work routine is repeatedly performed based on the received signals. In addition, the mouse signal and keyboard signal which control the computer and various control signals and microphone signal are outputted to the computer in Step S25, S26, S27 and S28.

Therefore, a user who uses the TV and computer according to the present invention is capable of controlling the computer through the TV and is capable of implementing computer video and audio signals on the TV by operating the computer.

Namely, in the connection apparatus according to the present invention, since the computer and TV which are separately used in the conventional art are connected by a transmission line, it is possible to integrally control the computer and TV. Therefore, the connection apparatus according to the present invention is

capable of effectively connecting the computer and TV compared to the conventional art.

As the present invention may be embodied in several forms without departing from the spirit or essential characteristics thereof, it should also be understood that the above-described embodiment is not limited by any of the details of the foregoing description, unless otherwise specified, but rather should be construed broadly within its spirit and scope as defined in the appended claims, and therefore all changes and modifications that fall within the meets and bounds of the claims, or equivalences of such meets and bounds are therefore intended to be embraced by the appended claims.

What is claimed is:

1. An apparatus for connecting a TV(Television set) and a computer, comprising:

a TV coding unit for encoding various control signals such as a TV signal, etc. generated in a TV and generating a first packet signal;

a computer coding unit for encoding a computer signal such as a video signal, audio signal and various control signals generated in a computer and generating a second packet signal;

a TV transmission and receiving unit for receiving the first packet signal, transmitting the received first packet signal to the outside and receiving the second packet signal from the outside;

a computer transmission and receiving unit for receiving the second packet signal, transmitting the received second packet signal to the outside and receiving the first packet signal from the outside;

a TV decoding unit for receiving the second packet signal from the TV transmission and receiving unit, decoding the same and recovering into an original signal;

a computer decoding unit for receiving the first packet signal from the computer transmission and receiving unit, decoding the received first packet signal and recovering into an original signal; and

a transmission line connected between the TV transmission and receiving unit and the computer transmission and receiving unit for transmitting the first packet signal and the second packet signal.

2. The apparatus of claim 1, wherein said transmission line includes:

a first transmission line for transmitting the first packet signal from the TV transmission and receiving unit to the computer transmission and receiving unit; and

5 a second transmission line for transmitting the second packet signal from the computer transmission and receiving unit to the TV transmission and receiving unit.

3. A TV(Television set), comprising:

10 a TV coding unit for encoding a TV signal such as various control signals generated in a TV(Television set) and generating a first packet signal;

a TV transmission and receiving unit for transmitting the first packet signal to the outside and receiving the second packet signal from the outside;

a TV decoding unit for decoding the second packet signal and recovering into an original signal; and

15 a signal selection unit for selecting the signal recovered by the TV decoding unit and a TV video signal.

4. The apparatus of claim 3, wherein said second packet signal is generated by encoding the video signal and audio signal and various control  
20 signals generated in a computer which is separately installed.

5. A computer, comprising:

a computer coding unit for encoding a computer signal such as a video signal, audio signal and various control signals generated in a computer and  
25 generating a second packet signal;

a computer transmission and receiving unit for transmitting the second packet signal to the outside and receiving a first packet signal from the outside;

a computer decoding unit for decoding the first packet signal and recovering into an original signal; and

an interface unit for inputting the signal recovered by the computer decoding unit into a main board of the computer.

6. The computer of claim 5, wherein said first packet signal is generated by encoding various control signals generated in a TV which is separately installed.

7. A computer operation method, comprising the steps of:

a first step for performing a main routine;

a second step for outputting a video signal data, an audio signal data and a control data of a computer to a TV; and

a third step for receiving a mouse data, a keyboard data and a control data from the TV.

8. A TV(Television set) operation method, comprising the steps of:

a first step for performing a main routine;

a second step for receiving a video signal data, an audio signal data and a control data from a computer; and

a third step for outputting a mouse data, a keyboard data and a control data to the TV.



## ABSTRACT OF THE DISCLOSURE

An apparatus for connecting a computer and a TV is disclosed. The apparatus according to the present invention includes a TV coding unit for encoding various control signals such as a TV signal, etc. generated in a TV and generating a first packet signal, a computer coding unit for encoding a computer signal such as a video signal, audio signal and various control signals generated in a computer and generating a second packet signal, a TV transmission and receiving unit for receiving the first packet signal, transmitting the received first packet signal to the outside and receiving the second packet signal from the outside, a computer transmission and receiving unit for receiving the second packet signal; transmitting the received second packet signal to the outside and receiving the first packet signal from the outside, a TV decoding unit for receiving the second packet signal from the TV transmission and receiving unit, decoding the same and recovering into an original signal, a computer decoding unit for receiving the first packet signal from the computer transmission and receiving unit, decoding the received first packet signal and recovering into an original signal, and a transmission line connected between the TV transmission and receiving unit and the computer transmission and receiving unit for transmitting the first packet signal and the second packet signal.

FIG. 1  
CONVENTIONAL ART



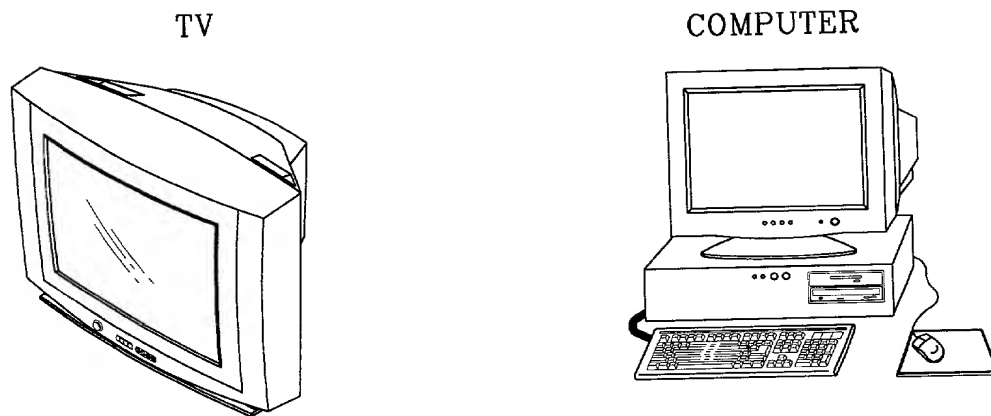



FIG. 2

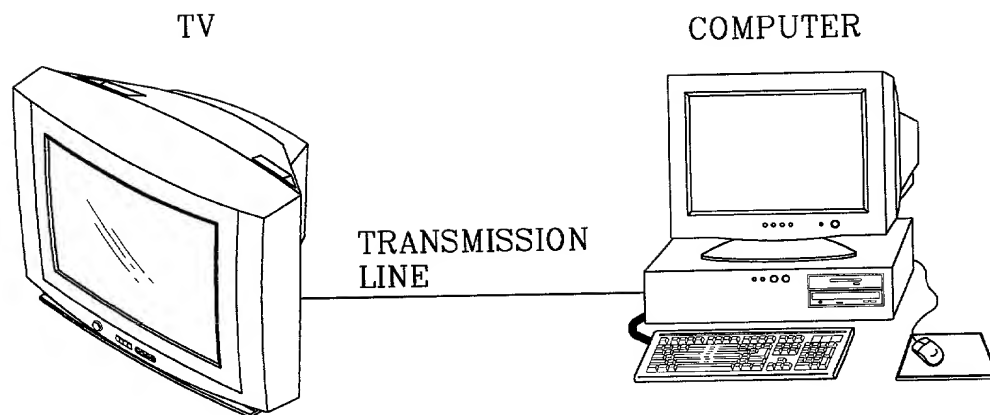

# FIG. 3

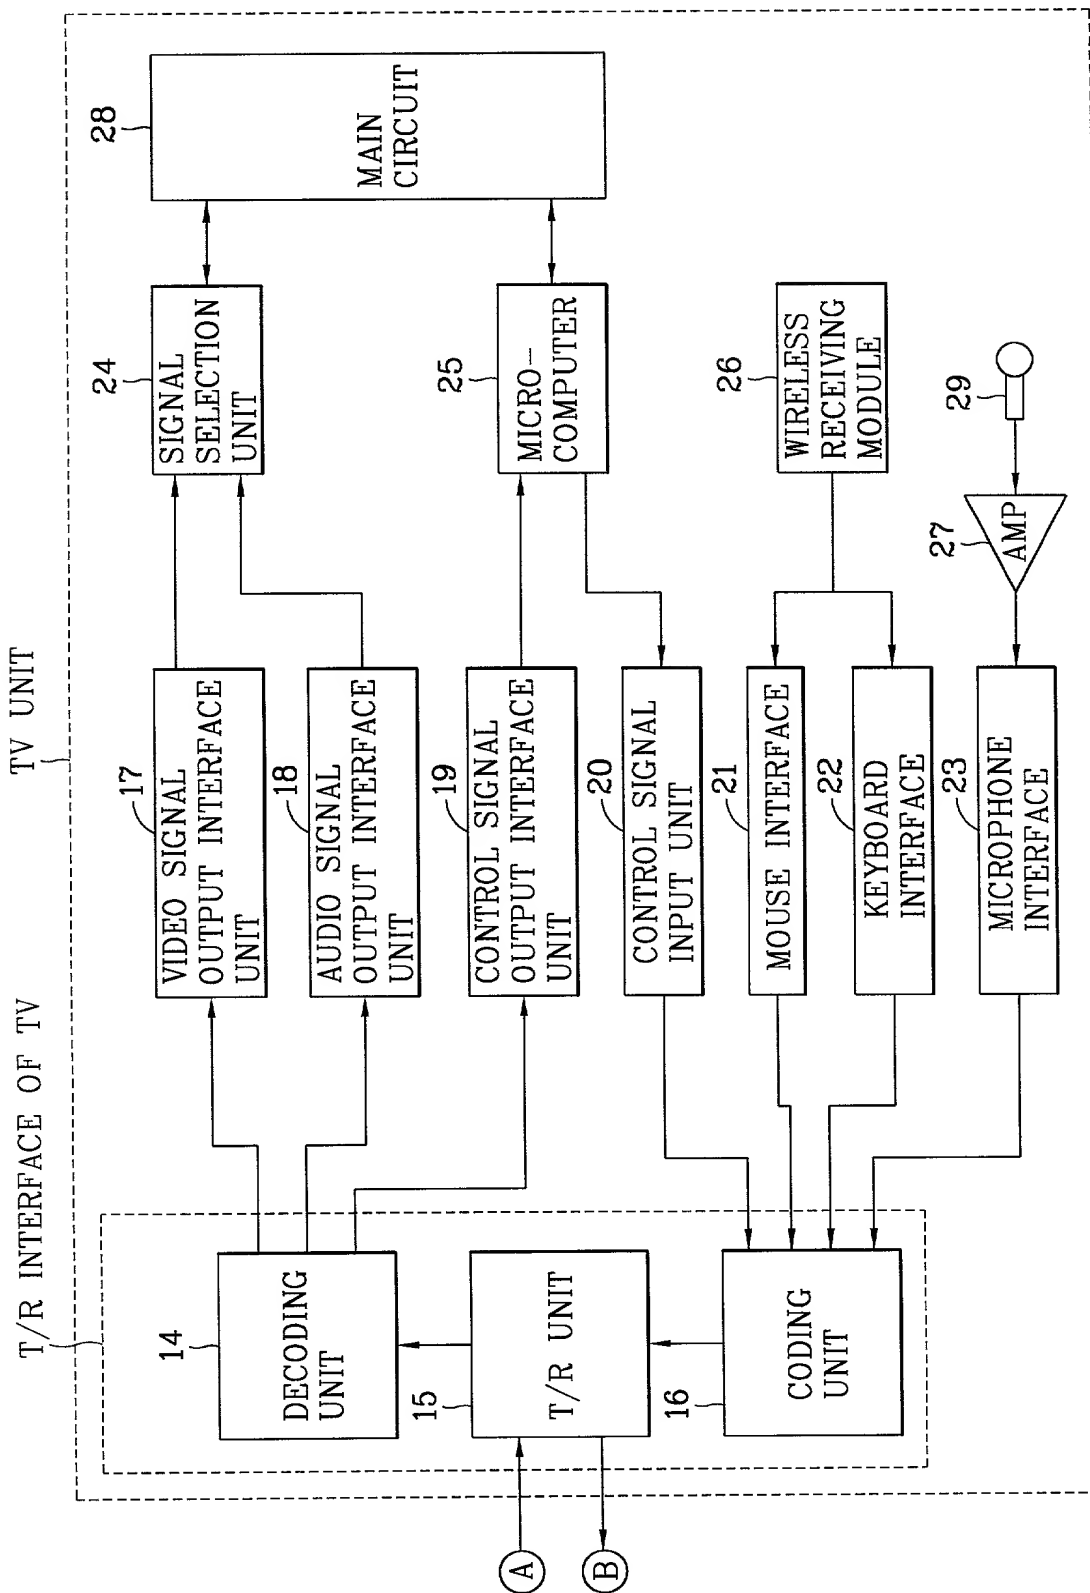

# FIG. 3

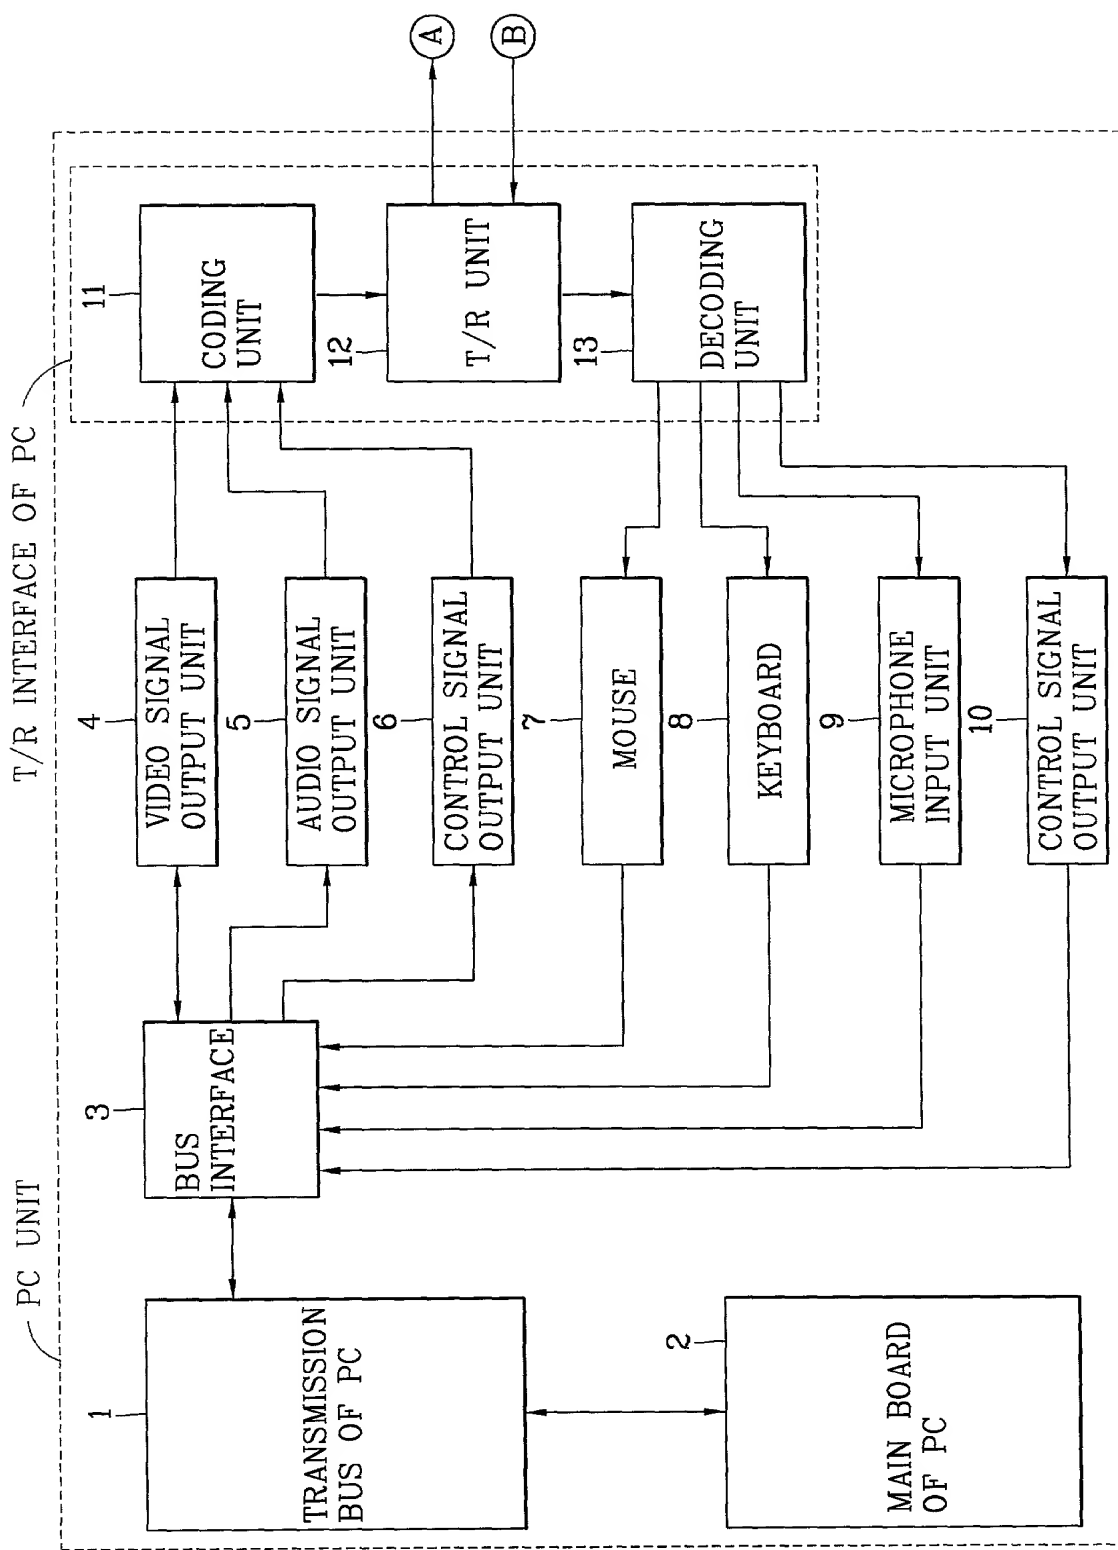

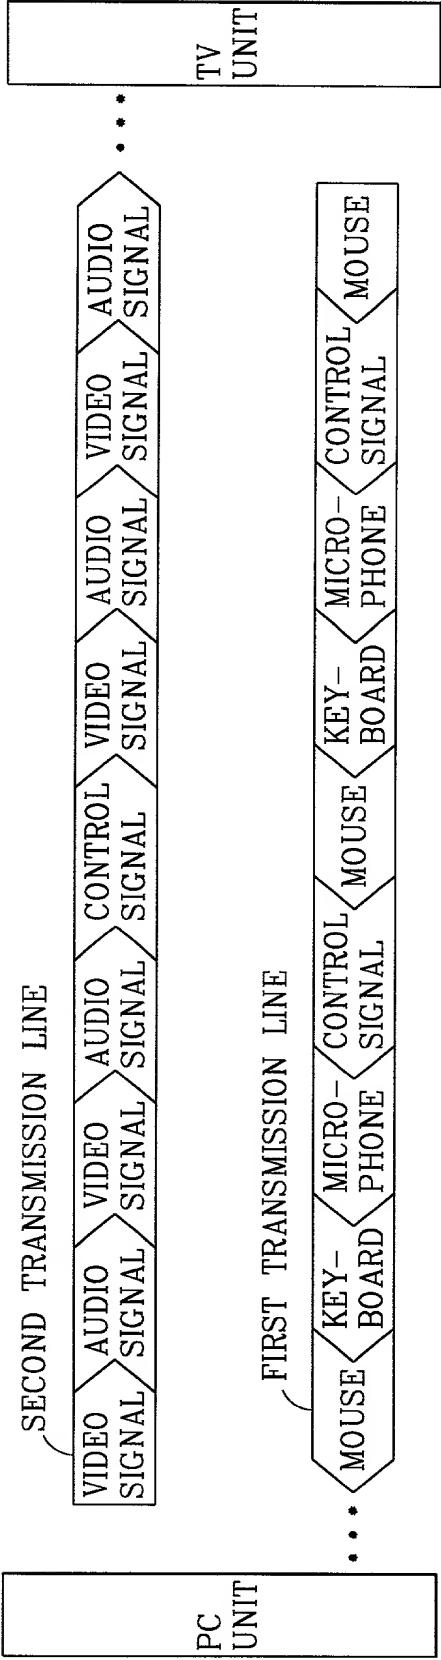


FIG. 5A


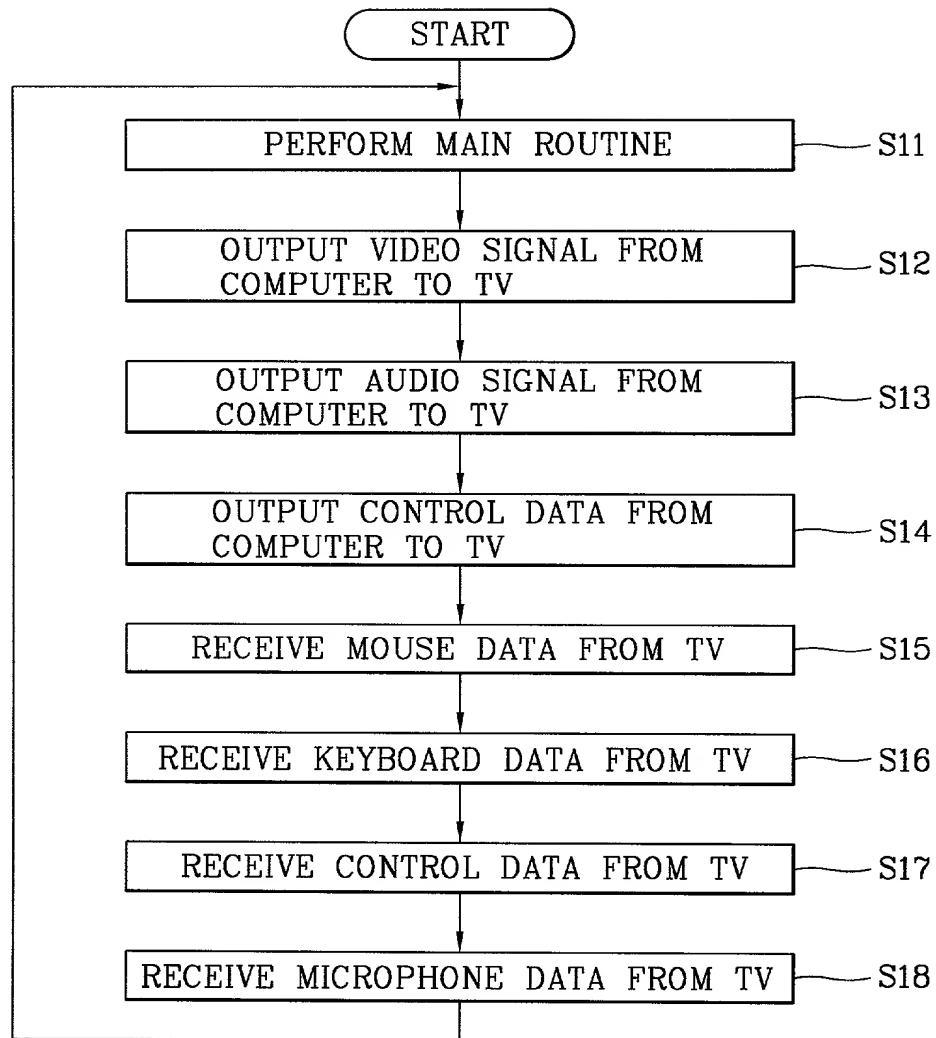


FIG. 5B

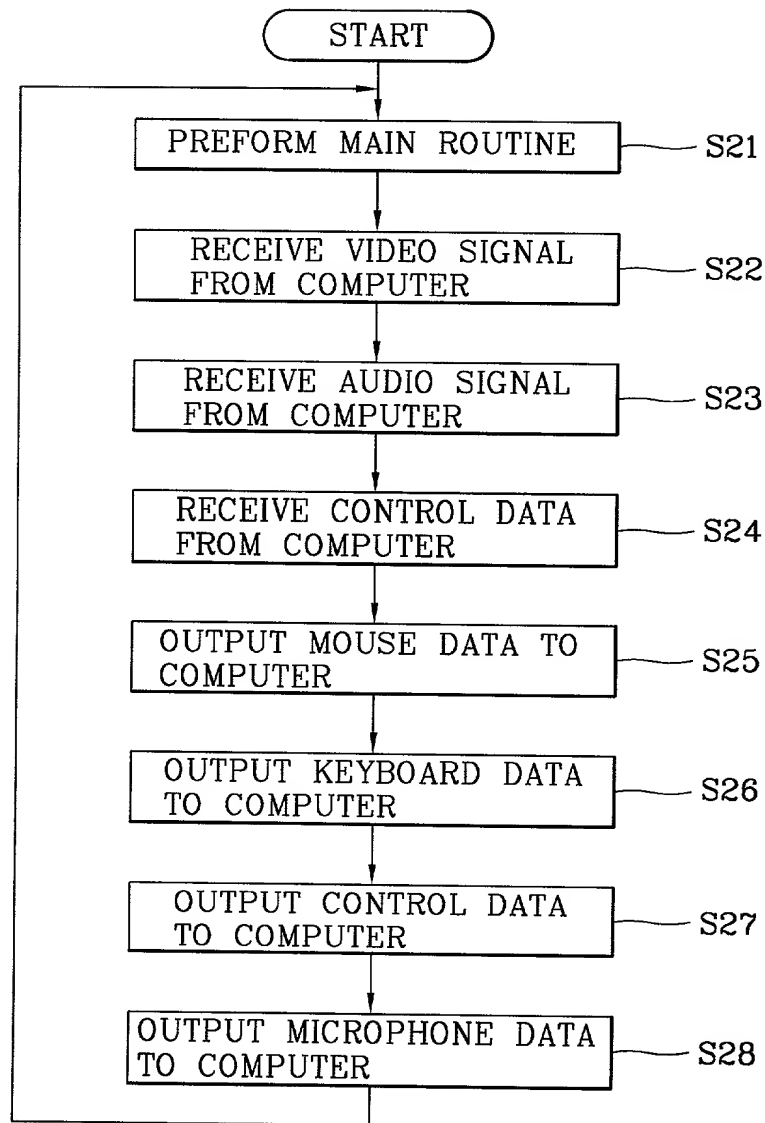

Docket No. \_\_\_\_\_

**DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that:

My residence, post office and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names listed below) of the subject matter claimed and for which a patent is sought on the invention entitled APPARATUS FOR CONNECTING TV AND COMPUTER specification of which☒ is attached hereto ☐ was filed on \_\_\_\_\_ as Application Serial 131  
\_\_\_\_\_ and was  
\_\_\_\_\_ amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by all amendment referred to above.

I acknowledge the duty to disclose information which is known to me to be material to patentability in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365 (b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below. I have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

**Prior Foreign Application(s):****Number****Country****Foreign Filing Date****Month/Day/Year**49266/1999Korea11/08/1999

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

**Application Number(s):****Filing Date (Month/Day/Year)**

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

**Prior U. S. Application  
or PCT Patent Number****Filing Date (Month/Day/Year)****Parent Patent Number****(if applicable)**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.




FROM: LGTV

I hereby appoint the following attorney(s) and/or agent(s): Daniel Y.J. Kim, Registration No. 36,186 and Mark L. Flehner, Registration No. 34,596, Carl R. Wesolowski, Registration No. 40,372, John C. Eisenhart, Registration No. 38,128, Rene A. Vazquez, Registration No. 38,614, Michael J. Cornelison, Registration No. 40,395, and Stuart I. Smith, Registration No. 42,159, and Carol L. Druzbick, Registration No. 40,341 all of

FLESHNER & KIM  
P. O. Box 221200  
Chantilly, Virginia 20153-1200

with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and all future correspondence should be addressed to them.

Full name of sole or first inventor: Won-Uk YU

Inventor's signature: 

Date: 2000. 11. 11

Residence: Daeju, Korea

Citizenship: Republic of Korea

Post Office Address: Chilgok Geumbittown 102-1307, 655, Kuam-Dong, Book-Ku, Daeju, Korea

Full name of joint inventor(s):

Inventor's signature:

Date:

Residence:

Citizenship:

Post Office Address:

Full name of joint inventor(s):

Inventor's signature:

Date:

Residence:

Citizenship:

Post Office Address: